

FIG. 2

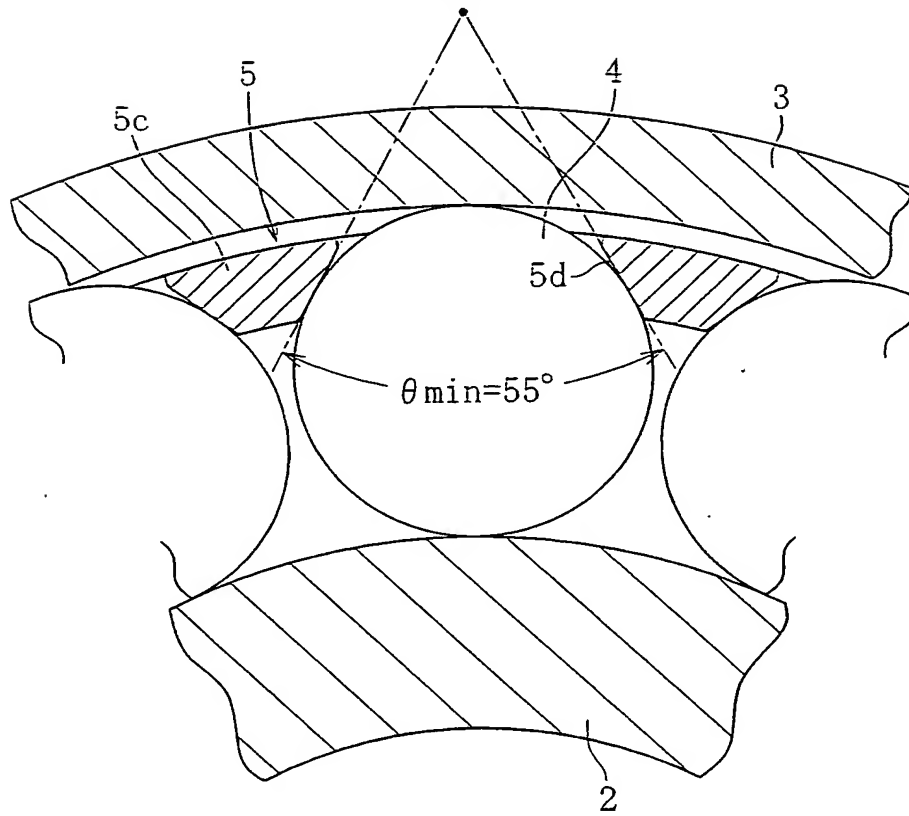


FIG. 3

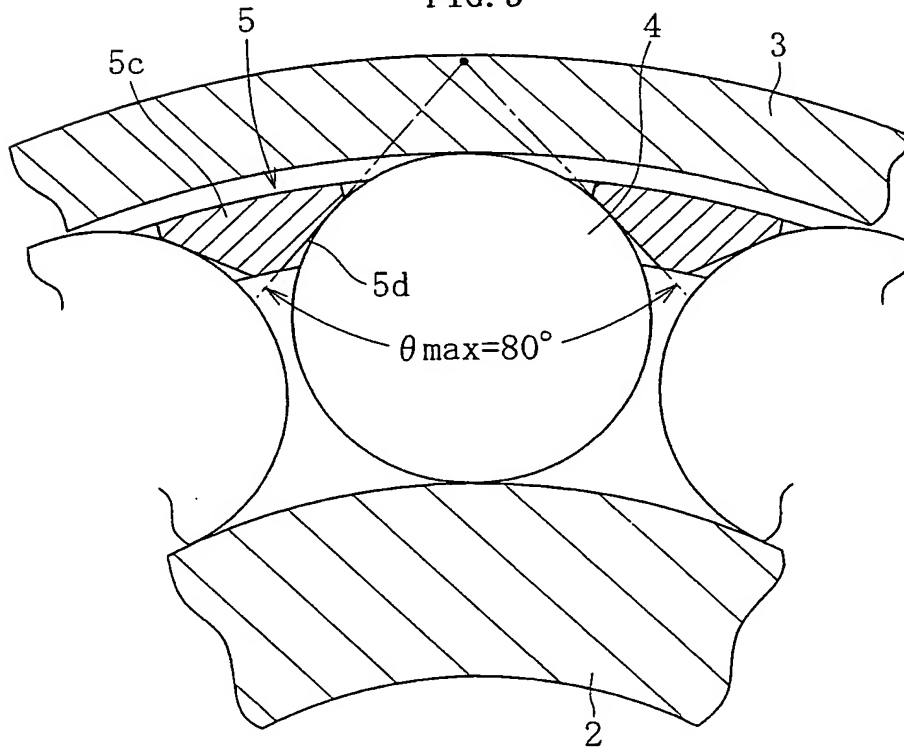


FIG. 4

Bearing	Roller coefficient	Lifetime	Remarks
Comparative example 1 (Conventional bearing with cage made of steel plate)	0.86	16.4 hours	Flaking was observed on the inner ring.
Embodiment 1 (Bearing with cage made of steel plate)	0.96	40.2 hours	Stoppage occurred due to increased torque caused by abrasion at th cage.
Embodiment 2	0.96	200 hours or more	No abnormality was observed, and the test was terminated.

FIG. 5

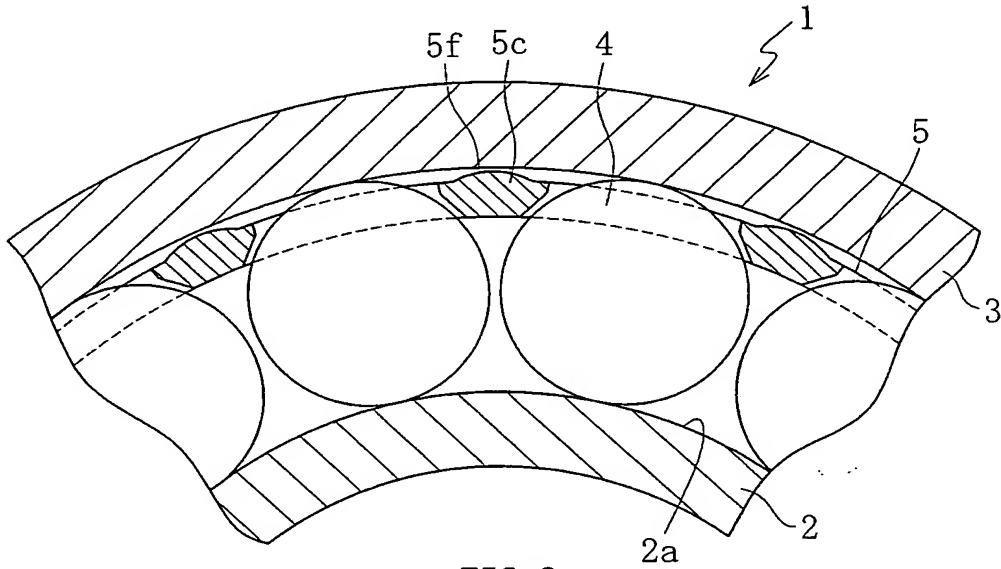


FIG. 6

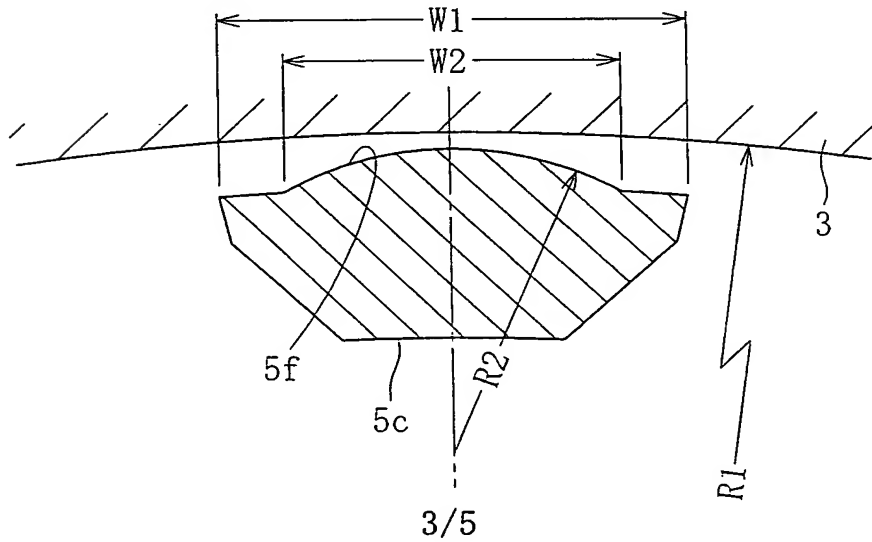


FIG. 7 (PRIOR ART)

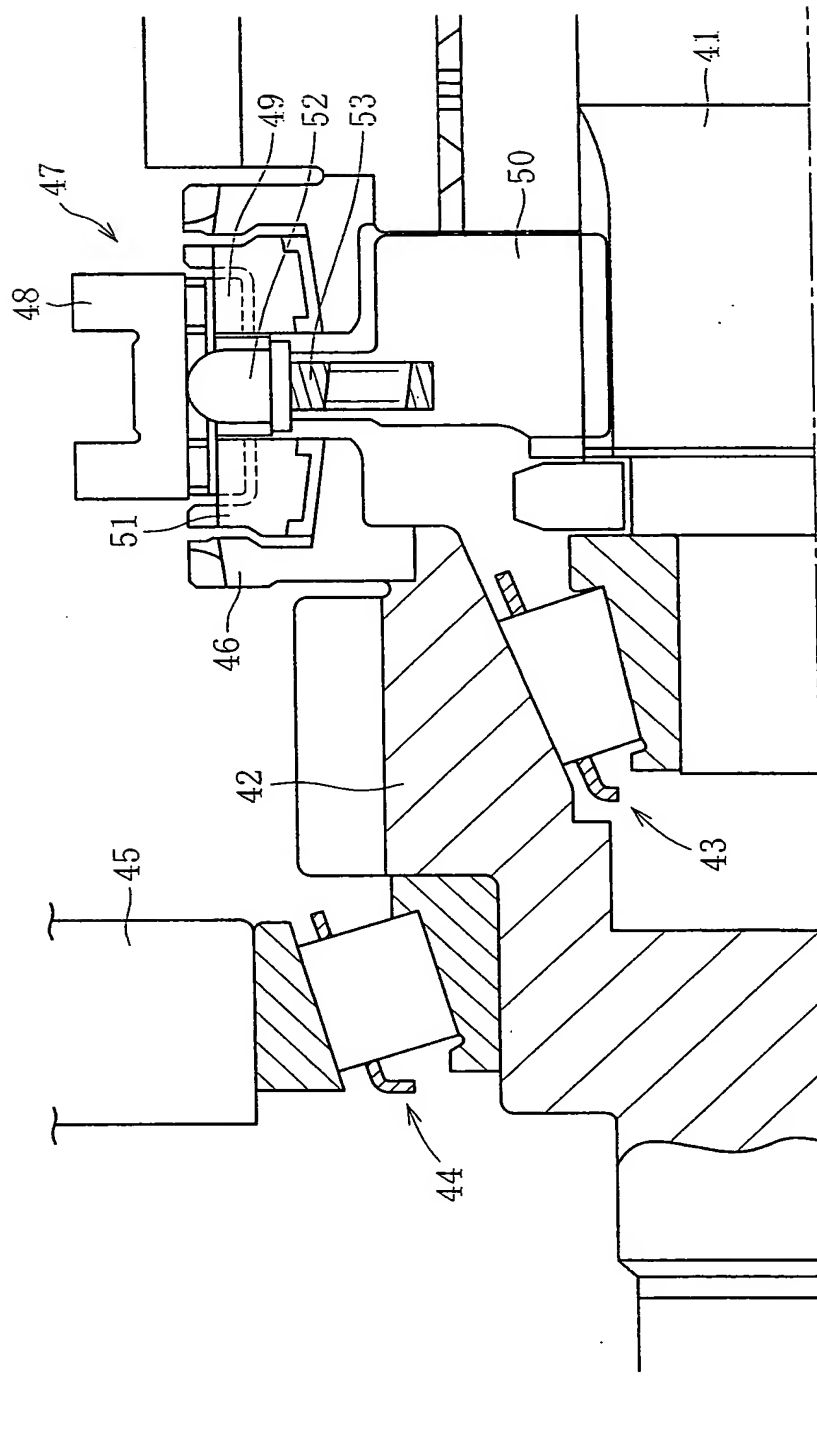


FIG. 8 (PRIOR ART)

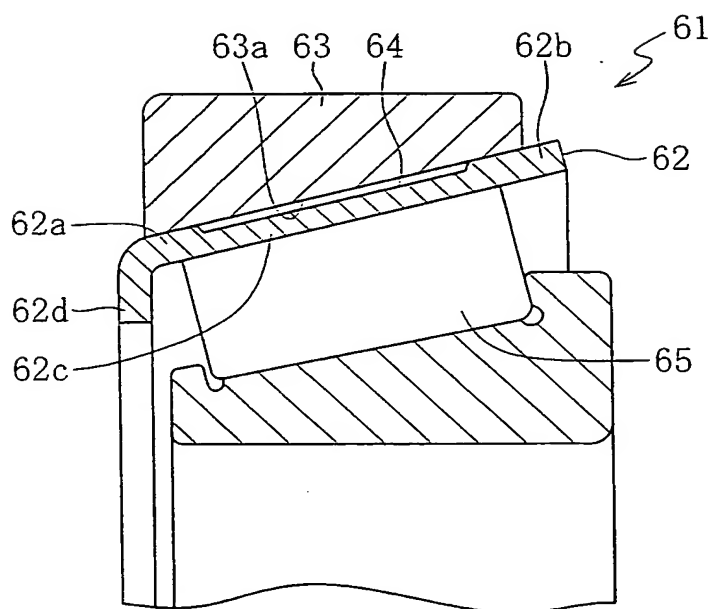


FIG. 9 (PRIOR ART)

